





HOOKLIFT TAL - 20

Model	Hg	A	B	C	D	F	G	Weight	α	min.	max.
ITK 20/7 C	1.430/1.570	6.150	5.750	1.150	850	2.890	3.400	2.930 kg	57°	4.700	6.700
ITK 20/7 NC	1.430/1.570	6.350	5.950	1.150	850	2.890	3.500	2.960 kg	53°	4.900	6.900
ITK 20/7 N	1.430/1.570	6.550	6.150	1.150	850	2.890	3.600	2.990 kg	51°	5.100	7.100
ITK 20/7 NL	1.430/1.570	6.750	6.350	1.150	850	2.890	3.700	3.020 kg	48°	5.300	7.300
ITK 20/7 L	1.430/1.570	6.950	6.550	1.150	850	2.890	3.800	3.050 kg	45°	5.500	7.500





HOOKLIFT TAL - 30

Model	Hg	A	B	C	S	F	G	Weight	α	min.	max.
ITK 30/7 NC	1.430/1.570	6.370	5.940	1.150	3.900	2.785	3.400	3.300 kg	55°	4.400	6.900
ITK 30/7 N	1.430/1.570	6.570	6.140	1.150	4.100	2.785	3.600	3.350 kg	52°	4.600	7.100
ITK 30/7 NL	1.430/1.570	6.770	6.360	1.150	4.300	2.785	3.750	3.400 kg	49°	4.800	7.300
ITK 30/7 L	1.430/1.570	6.960	6.550	1.150	4.500	2.785	3.900	3.450 kg	46°	5.000	7.500




HOOKLIFT TA - 30

Model	Hg	A	B	C	S	F	G	Weight	α	min.	max.
ITK 30/6 N	1.430/1.570	5.560	5.160	850	3.130	2.550	3.100	3.200 kg	51°	3.850	6.100
ITK 30/6 NL	1.430/1.570	5.760	5.360	850	3.330	2.550	3.250	3.250 kg	48°	4.050	6.300
ITK 30/6 L	1.430/1.570	5.960	5.560	850	3.530	2.550	3.400	3.300 kg	45°	4.250	6.500

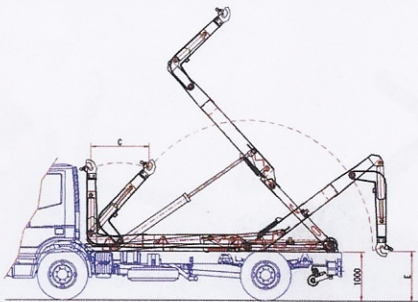


HOOKLIFT A 14/16


Model	A	B	C	D	E	F	G	T	Kit weight	Tipping angle	Container length min - max
A 14/16 C	4.820	4.520	1.200	1.100	900	2.530	2.465	1.510	1.920 kg	51°	4.000-5.500
A 14/16 NC	5.020	4.720	1.200	900	900	2.530	2.600	1.710	1.950 kg	48°	4.200-5.700
A 14/16 N	5.220	4.920	1.200	1.100	1.020	2.680	2.735	1.710	1.970 kg	48°	4.400-5.900
A 14/16 NL	5.420	5.120	1.050	900	1.020	2.680	2.870	1.910	1.990 kg	45°	4.600-6.100
A 14/16 L	5.620	5.320	1.050	1.050	1.140	2.830	3.005	1.910	2.010 kg	45°	4.800-6.300



HOOKLIFT A - 20



MECHANICAL HOOK SECURITY



PNEUMATIC HOOK SECURITY

Model	A	B	C	D	E	F	T	Weight kit	Tipping angle	Container length min. / max.
A 20 C	5.050	4.800	1.050	1.650	1.030	3.000	1.310	2.170 kg	55°	4.200 - 5.700
A 20 NC	5.250	5.000	1.050	1.450	1.250	3.000	1.510	2.210 kg	51°	4.400 - 5.900
A 20 N	5.450	5.200	1.050	1.250	1.250	3.000	1.710	2.240 kg	48°	4.600 - 6.100
A 20 NL	5.650	5.400	1.050	1.050	1.250	3.000	1.910	2.270 kg	45°	4.800 - 6.300
A 20 L	5.850	5.600	1.050	850	1.250	3.000	2.110	2.300 kg	42°	5.000 - 6.500

